



CHECK VALVE TYPE UZZD 20 CARTRIDGE DESIGN

**WK
450 348**

Size 20

up to 32 MPa

100 dm³/min

04.1999r.

Check valve cartridge are used in hydraulic systems, where free flow in one direction and self-acting closure in the opposite direction are required. These valves can be applied as low-pressure overflow valves for keeping pressure drop at a constant level.


Valves can be installed in any desired position in special seats.

Sealing of interfaces is provided by O-rings which are included.



DESCRIPTION OF OPERATION



The plug 2 being simultaneously the seat for the spring is mounted in the sleeve 1. The spring pushes the poppet 3 onto the internal edge of the sleeve. If a pressure difference in port A exceeds the cracking pressure determined by the spring, the poppet will move along allowing free flow from port A to B.

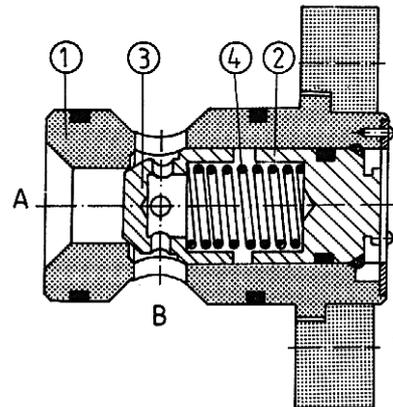

TECHNICAL DATA


Hydraulic fluid	Mineral oil or phosphate ester
Nominal fluid viscosity	37 mm ² /s at the temperature of 328 K
Viscosity range	2.8 to 380 mm ² /s
Optimum working temperature (fluid in a tank)	313 - 328 K
Fluid temperature range	243 - 343 K
Required fluid filtration	16 μm
Recommended fluid filtration	10 μm
Maximum working pressure	32 MPa
Cracking pressure	0.05; 0.1; 0.15 MPa
Weight	1.8 kg

OVERALL DIMENSIONS

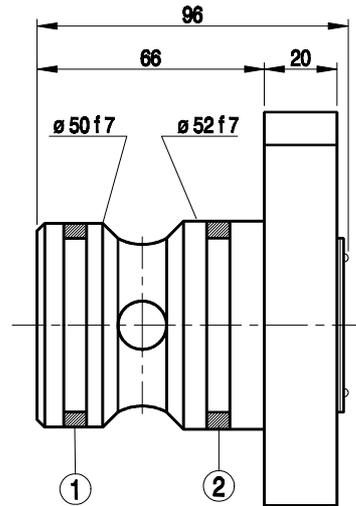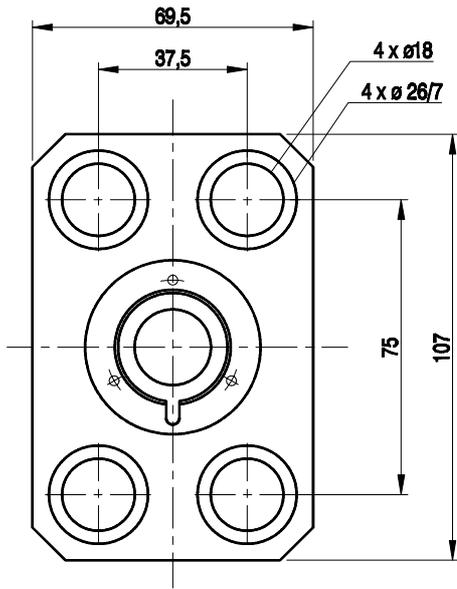


- item 1 - o-ring 44.2 x 3 - 1 piece
- item 2 - o-ring 48 x 2 - 1 piece

Seat dimensions

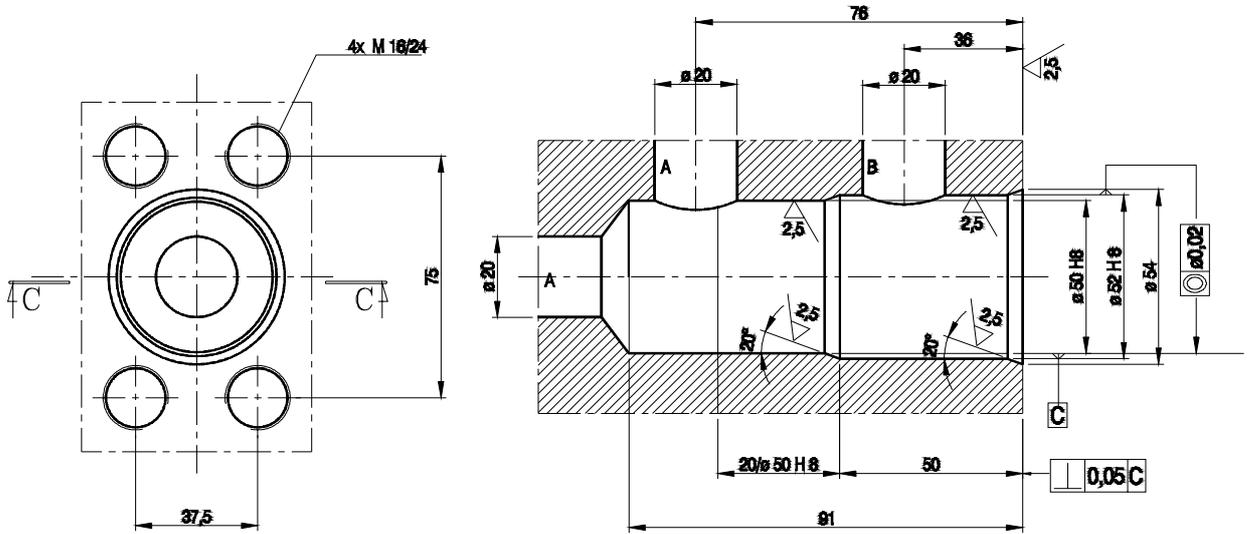

Fitting the valve into the seat by means of 4 bolts M16 x 30 - 10.9 PN - 74/M - 82302 (DIN 912).
 Torque for tightening - 50 Nm
 The bolts are not included with the valve.

PERFORMANCE CURVES, measured at $v = 41 \text{ mm}^2/\text{s}$ and $T = 323 \text{ K}$

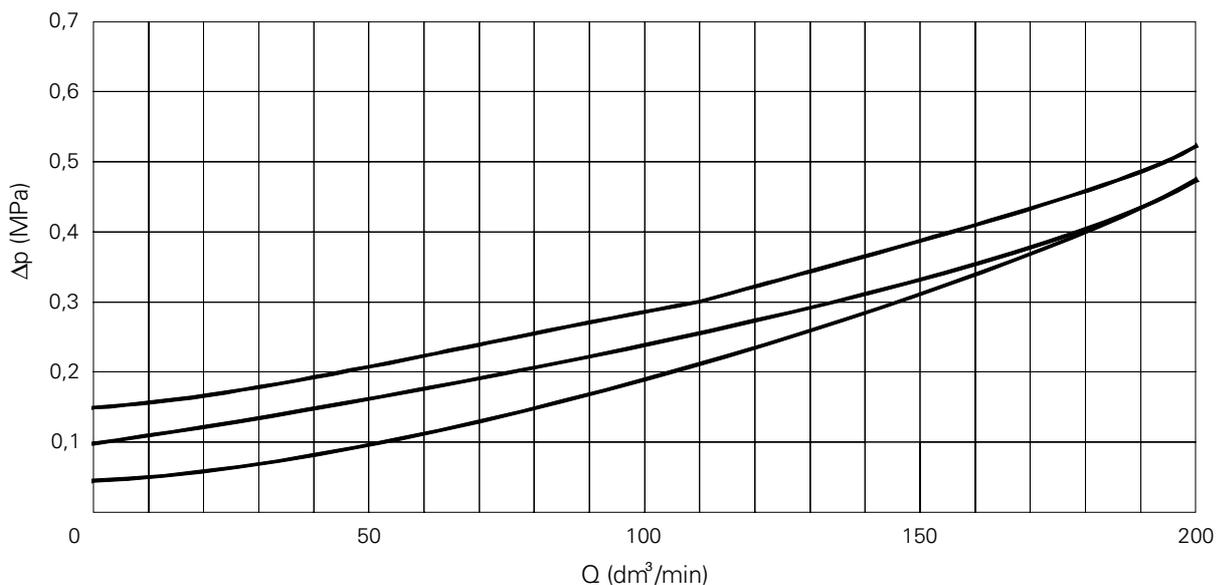


SCHEME



Graphical symbol

HOW TO ORDER

Orders coded in the way showed below should be forwarded to the manufacturer.



Series number :
 20 = 20
 (20-29) - installation and connection dimensions unchanged

Additional requirements in clear text
 (to be agreed with the manufacturer)

Cracking pressure
 Cracking pressure 0.05 MPa = 05
 Cracking pressure 0.10 MPa = 10
 Cracking pressure 0.15 MPa = 15

Sealing
 Fluids on mineral oil base = no designation
 Fluids on phosphate ester base = V

Coding example : UZZD 20 - 20/05



Q-HYDRAULIKA, Rakovník
Rabasova 2281, 269 01 Rakovník, tel./fax: 313 514 718
e-mail: info@q-hydraulika.cz, www.q-hydraulika.cz